

Wir fertigen Anschlagseile gemäß Ihren Anforderungen.

Anschlagseile mit Stahleinlage auf Anfrage.

Anschlagseile mit größeren Schlaufen auf Anfrage.

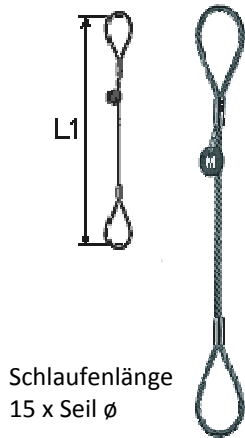


Abb.1 Anschlagdrahtseile mit Fasereinlage

Tragfähigkeit	Artikel	Seil	Länge L1	Stück	Mehrpreis
in t	Nr.	ø	m	Euro	pro m
0,7	100450/1	8	1	7,70	1,10
1,0	100451/1	10	1	10,40	1,80
1,5	100452/1	12	1	12,50	3,00
2,0	100454/1	14	1	14,10	3,70
2,7	100455/1	16	1	18,90	4,80
3,2	100456/1	18	1	25,00	5,10
4,0	100457/1	20	2	38,30	7,00
5,0	100458/1	22	2	46,50	7,80
6,3	100457/1	24	2	60,60	8,70
7,0	100460/1	26	2	77,50	11,00
8,0	100461/1	28	2	87,90	12,20




Abb.2 Anschlagdrahtseile mit Kauschen, Fasereinlage

Tragfähigkeit	Artikel	Seil	Länge L1	Stück	Mehrpreis
in t	Nr.	ø	m	Euro	pro m
0,7	100450/2	8	1	8,40	1,10
1,0	100451/2	10	1	11,40	1,80
1,5	100452/2	12	1	14,40	3,00
2,0	100454/2	14	1	17,80	3,70
2,7	100455/2	16	1	22,20	4,80
3,2	100456/2	18	1	29,50	5,10
4,0	100457/2	20	1	35,30	7,00
5,0	100458/2	22	1	46,60	7,80
6,3	100457/2	24	1	60,50	8,70
7,0	100460/2	26	1	75,90	11,00
8,0	100461/2	28	1	85,50	12,20



Abb.15 Anschlagdrahtseile mit Fasereinlage

Tragfähigkeit	Artikel	Seil	Länge L1	Stück	Mehrpreis
in t	Nr.	ø	m	Euro	pro m
0,7	100450/15	8	1	19,70	1,10
1,0	100451/15	10	1	22,70	1,80
1,5	100452/15	12	1	28,60	3,00
2,0	100454/15	14	1	33,70	3,70
2,7	100455/15	16	1	46,20	4,80
3,2	100456/15	18	1	53,50	5,10
4,0	100457/15	20	2	75,10	7,00
5,0	100458/15	22	2	85,65	7,80
6,3	100457/15	24	2	126,80	8,70
7,0	100460/15	26	2	140,00	11,00
8,0	100461/15	28	2	151,00	12,20

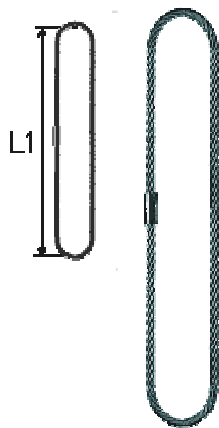


Abb. Endlos verpresst Anschlagdrahtseile mit Fasereinlage

Tragfähigkeit in t	Artikel Nr.	Seil ø	Länge L1 m	Stück Euro	Mehrpreis pro m
1,4	100450/E	8	1	9,00	2,20
2,0	100451/E	10	1	13,00	3,60
3,0	100452/E	12	1	15,90	6,00
4,0	100454/E	14	1	18,20	7,60
5,4	100455/E	16	1	24,50	9,60
6,3	100456/E	18	1	31,10	10,30
8,0	100457/E	20	2	39,80	14,00
10,0	100458/E	22	2	48,00	15,90
12,6	100457/E	24	2	63,00	17,80
14,0	100460/E	26	2	78,90	22,10

Weitere Ausführungen auf Anfrage

Abb. 12



Abb. 17



Abb. 20



Abb. 27





















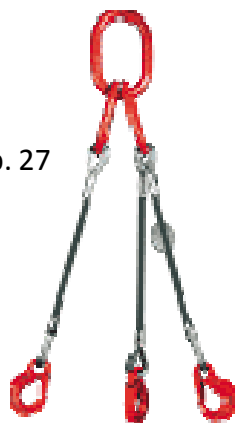


Abb. 25




## Tragfähigkeitstabelle Drahtseile mit Fasereinlage

Seil- durchmesser in mm	         										
	0°	0°	0 - 45°	0° - 45°	> 45° - 60°	> 45° - 60°	0° - 45°	>4	5° - 60°	0°	0°
8	700	560	950	800	700	560	1.450	>4	1.050	1.400	1.100
10	1.000	800	1.400	1.100	1.000	800	2.100	1.500	2.000	1.600	
12	1.500	1.200	2.100	1.700	1.500	1.200	3.200	2.300	3.000	2.400	
13	1.750	1.400	2.500	2.000	1.750	1.400	3.700	2.600	3.500	2.800	
14	2.000	1.600	2.800	2.200	2.000	1.600	4.200	3.000	4.000	3.200	
16	2.700	2.150	3.800	3.000	2.700	2.150	5.700	4.000	5.400	4.300	
18	3.150	2.500	4.400	3.500	3.150	2.500	6.600	4.700	6.300	5.000	
20	4.000	3.200	5.600	4.500	4.000	3.200	8.400	6.000	8.000	6.400	
22	5.000	4.000	7.000	5.600	5.000	4.000	10.500	7.500	10.000	8.000	
24	6.300	5.000	8.800	7.000	6.300	5.000	13.200	9.400	12.600	10.000	
26	7.000	5.600	9.800	7.800	7.000	5.600	14.700	10.500	14.000	11.200	
28	8.000	6.400	11.200	9.000	8.000	6.400	16.800	12.000	16.000	12.800	
32	11.000	8.800	15.400	12.300	11.000	8.800	23.000	16.500	22.000	17.600	
36	14.000	11.200	19.000	15.700	14.000	11.200	29.000	21.000	28.000	22.400	
40	17.000	13.600	23.500	19.000	17.000	13.600	36.000	26.000	34.000	27.200	
44	21.000	16.800	29.000	23.500	21.000	16.800	44.000	31.500	42.000	33.600	
48	25.000	20.000	35.000	28.000	25.000	20.000	52.000	37.000	50.000	40.000	

## Tragfähigkeitstabelle Drahtseile mit Stahleinlage

Seil- durchmesser in mm	         									
	0°	0°	0 - 45°	0° - 45°	> 45° - 60°	> 45° - 60°	0° - 45°	>45° - 60°	0°	0°
8	750	600	1.050	850	750	600	1.550	1.100	1.500	1.200
10	1.150	900	1.600	1.300	1.150	900	2.400	1.700	2.300	1.850
12	1.700	1.350	2.300	1.900	1.700	1.350	3.550	2.500	3.400	2.700
14	2.250	1.800	3.150	2.500	2.250	1.800	4.800	3.400	4.500	3.700
16	3.000	2.400	4.200	3.400	3.000	2.100	6.300	4.500	6.000	4.800
18	3.700	3.000	5.200	4.200	3.700	2.500	7.800	5.650	7.400	6.000
20	4.600	3.700	6.500	5.200	4.600	3.700	9.800	6.900	9.200	7.350
22	5.650	4.500	7.800	6.300	5.650	4.500	11.800	8.400	11.300	9.000
24	6.700	5.400	9.400	7.600	6.700	5.400	14.000	10.000	13.400	10.600
26	7.800	6.200	11.000	8.700	7.800	6.200	16.500	11.500	15.600	12.500
28	9.000	7.200	12.500	10.000	9.000	7.200	19.000	13.500	18.000	14.500
32	11.800	9.500	16.500	13.300	11.800	9.500	25.000	17.700	23.600	19.000
36	15.000	12.000	21.000	16.800	15.000	12.000	31.500	22.500	30.000	23.500
40	18.500	15.000	26.000	21.000	18.500	15.000	39.000	28.000	37.000	30.000
44	22.500	18.000	31.500	25.000	22.500	18.000	47.000	33.500	45.000	36.000
48	26.000	21.000	37.000	29.000	26.000	21.000	55.000	40.000	52.000	42.000

## Grummets / Endlosdrahtseile



Seil- durchmesser in mm	Grummets mit Fasereinlage									
	0°	0°	bis 7°	0° - 45°	> 45° - 60°	0° - 45°	0° - 45°	> 45 - 60°	60°	> 45 - 60°
12	2.100	1.650	4.200	2.950	2.100	2.950	2.350	2.100	1.650	
15	3.200	2.500	6.400	4.500	3.200	4.500	3.600	3.200	2.500	
18	4.650	3.700	9.300	6.500	4.650	6.500	5.200	4.650	3.700	
21	6.300	5.000	12.600	8.800	6.300	8.800	7.000	6.300	5.000	
24	8.300	6.500	16.600	11.600	8.300	11.600	9.300	8.300	6.600	
27	10.500	8.500	21.000	14.700	10.500	14.700	11.800	10.500	8.400	
30	11.500	9.000	23.000	16.100	11.500	16.100	12.900	11.500	9.200	
33	14.000	11.000	28.000	19.600	14.000	19.600	15.700	14.000	11.200	
36	16.500	13.000	33.000	23.100	16.500	23.100	18.500	16.500	13.200	
39	19.500	15.500	39.000	27.300	19.500	27.300	21.800	19.500	15.600	
42	22.500	18.000	45.000	31.500	22.500	31.500	25.200	22.500	18.000	
48	29.500	23.500	59.000	41.300	29.500	41.300	33.000	29.500	23.600	
54	37.500	30.000	75.000	52.500	37.500	52.500	42.000	37.500	30.000	
60	46.000	37.000	92.000	64.400	46.000	64.400	51.500	46.000	36.800	


Seil- durchmesser in mm	Grummets mit Stahleinlage									
	0°	0°	bis 7°	0° - 45°	> 45° - 60°	0° - 45°	0° - 45°	> 45 - 60°	60°	> 45 - 60°
12	2.200	1.750	4.400	3.000	2.200	3.000	2.400	2.200	1.750	
15	3.400	2.700	6.800	4.750	3.400	4.750	3.800	3.400	2.700	
18	4.900	3.900	9.800	6.850	4.900	6.850	5.500	4.900	3.900	
21	6.700	5.350	13.400	9.400	6.700	9.400	7.500	6.700	5.350	
24	9.000	7.200	18.000	12.600	9.000	12.600	10.080	9.000	7.200	
27	11.500	9.200	23.000	16.100	11.500	16.100	12.900	11.500	9.200	
30	14.000	11.200	28.000	19.600	14.000	19.600	15.700	14.000	11.200	
33	17.000	13.600	34.000	23.800	17.000	23.800	19.000	17.000	13.600	
36	20.000	16.000	40.000	28.000	20.000	28.000	22.400	20.000	16.000	
39	23.500	18.800	47.000	32.900	23.500	32.900	26.300	23.500	18.800	
42	27.000	21.500	54.000	37.800	27.000	37.800	30.200	27.000	21.600	
48	35.500	28.400	71.000	49.700	35.500	49.700	39.800	35.500	28.400	
54	45.000	36.000	90.000	63.000	45.000	63.000	50.400	45.000	36.000	
60	55.500	44.400	111.000	77.700	55.500	77.700	62.200	55.500	44.400	

### Grummets mit Fasereinlage

Seildurchmesse in mm	Artikel Nr.
12	100500
15	100501
18	100502
21	100503
24	100504
27	100505
30	100506
33	100507
36	100508
39	100509
42	100510
48	100511
54	100512
60	100513

### Grummets mit Stahleinlage

Seildurchmesse in mm	Artikel Nr.
12	100520
15	100521
18	100522
21	100523
24	100524
27	100525
30	100526
33	100527
36	100528
39	100529
42	100530
48	100531
54	100532
60	100533



Bestellbeispiel :

Grummet D=12 mm mit  
Stahleinlage Umfanglänge 5 m

Bestell Nr.

100520/5